

# 2472-3150 Water Softener

Commercial Automatic



Est-1987

## WATERWAYS

Quality ways with water


**Product Description:** Water softeners are typically used for removing calcium carbonate, manganese, iron and hardness from water sources and are regenerated by brine solutions. The treated water is soft and non scaling/staining. Commercial systems are available in single or twin (duplex) models and domestic units are available in cabinet style models.

### Specifications

Type	Automatic Water Softener	
Description	Self standing pressure vessel (blue) with top mounted valve and separate brine tank (black)	
Capacity	165,000 litres at 100 mg/l hardness	
Media Tank	24" (61cm) x 72" (183cm) wound fibreglass pressure vessel	
Resin Capacity	250 litres of fine mesh cation resin	
Control Valve	Fleck 3150 5 stage regeneration Industrial Valve Volume (on demand) regeneration	
Brine Tank	30" (76cm) x 48" (122cm) with lid	
Flow Rate	Continuous	200 litres per minute
	Peak	230 litres per minute
Pressure	Maximum	600 kpa (85psi)
	Minimum	175 kpa (25psi)
Pipe Sizes	Inlet/outlet	2" (50mm)
	Drain	1" (25mm)
Salt Usage	24kg per regeneration	
Voltage	240 volts with 24 volts step down transformer	

Note: Product specifications are a guide only and can change without notice.

To us it's more than just water...

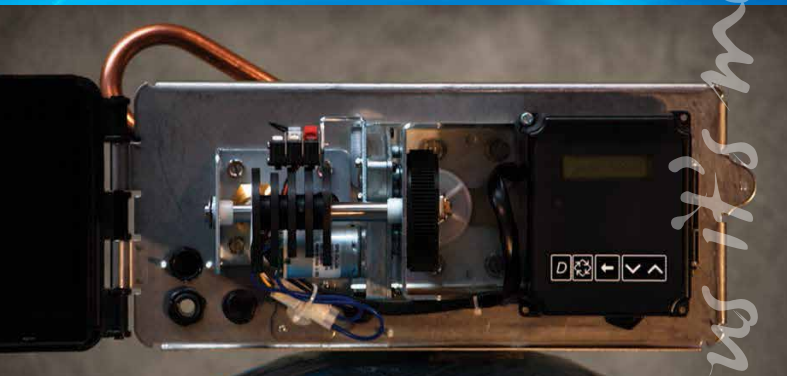

Est-1987 Australian Owned & Operated

### Waterways Products (Aust) Pty Ltd

23 Aldershot Road, Lonsdale SA 5160  
 PO Box 443 Lonsdale DC SA 5160  
 Telephone 08 8186 0189 Facsimile 08 8382 7488  
 Email: [enquiries@waterwaysproducts.com](mailto:enquiries@waterwaysproducts.com)  
[www.waterwaysproducts.com](http://www.waterwaysproducts.com)